





Tener 3D 2,4

Application:

- For 2D auditoria
- For passive 3D technologies using polarized light
- Special 3D effects

Projection surface:

- Perforated / Non-perforated
- Invisible seams
- Excellent viewing angle
- Bright picture, excellent colour temperature
- Very low depolarisation level, SCR factor ≥ 250

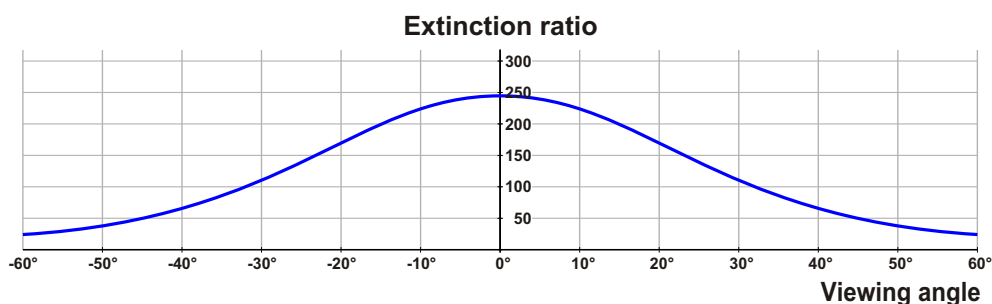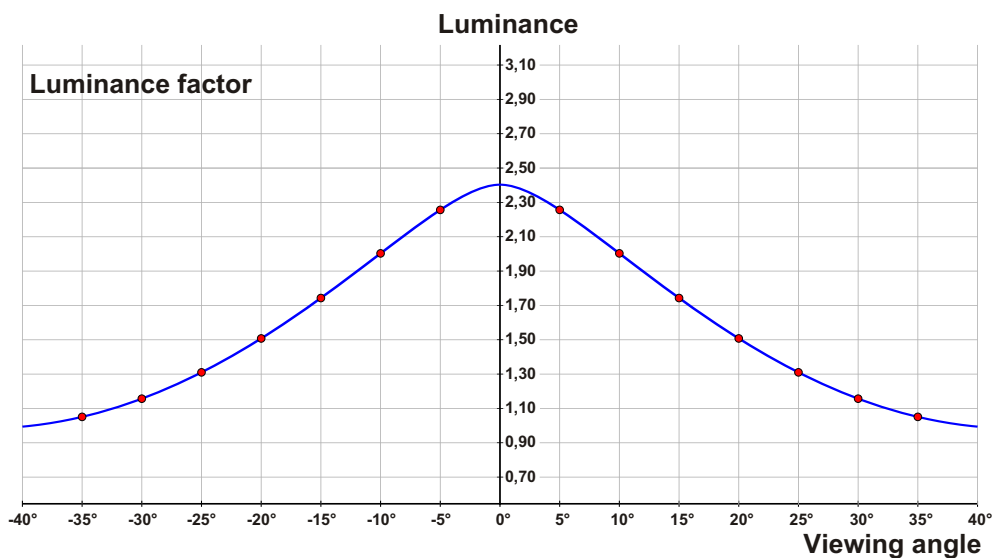

Technical characteristics:

- Material: Stretchable PVC with Aluminium coating
- Colour: Silver
- Gain: 2,4
- HGA: 28°
- SCR: ≥ 250
- Perforation: Standard / Mini
- Weight: 420 g/sqm
- Transparency: <1%
- Thickness: 290 μm
- Packing method: Rolled

Reflection behavior

- Measurement procedure: luminance factor β measured with reference to barium sulphate according to DIN 19045