



Maxxscreen Giant F



robust truss frame



special cable winder



construction detail

Highlights

- 3D silver electric rollable screen up to size of 15 m width and 6,75 m height with no visible seam
- Rolling system where the projection screen surface rolls up around the slat bar which is rolled up with two steel cables
- Rolling system ensures the flattest possible surfaces for sizes over 12 metres wide and is the ideal choice for conference halls, theaters, cinemas and other large venues
- robust truss frame for maximum strength of construction
- The screen surface is given a high-quality coating after the welding whereby the horizontal seams are not longer visible
- Ceiling installation as standard
- Maintenance-free robust motor incl. thermo protection against overheating
- Easy and safe handling due to an electrical drive, rotary switch included
- Automatic electrical end switch at the top and bottom
- Safety brake preventing the self-unwinding of the canvas

Optional

- Customized sizes, special colour of casing, different types of screens surfaces on request
- RF remote control

Screen surface




- PVC based material with special coating
- Type D - matt white, Gain 1,0 / 1,4 / 1,6, back side white
- Type S - highly reflective, Gain 1,8
- Type 3D - aluminium silver coating for passive 3D technologies using polarized light, Gain 1,7 / 2,0 / 2,2 / 2,4
- Type R - Rear projection
- Neve - front and rear projection
- Optional perforation or mini-perforation of the surfaces for suitable surface types

The product is in conformity with the following EU-Standards and other Normative Documents

EG-Machine Directives 89/392/EWG
EMV-Directive 89/336/EWG
Low-voltage Directive 73/23/EWG

Applied norms and technical specifications:

DIN EN 292 Part 1+2
DIN EN 294
DIN EN 349
DIN 19045
DIN EN 55014 Part 1+2
DIN EN 61000-3-2
DIN EN 60335 Part 1
DIN ETS 300220
DIN ETS 300683
DIN ETS 60730

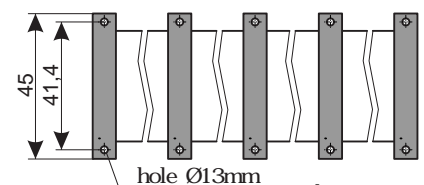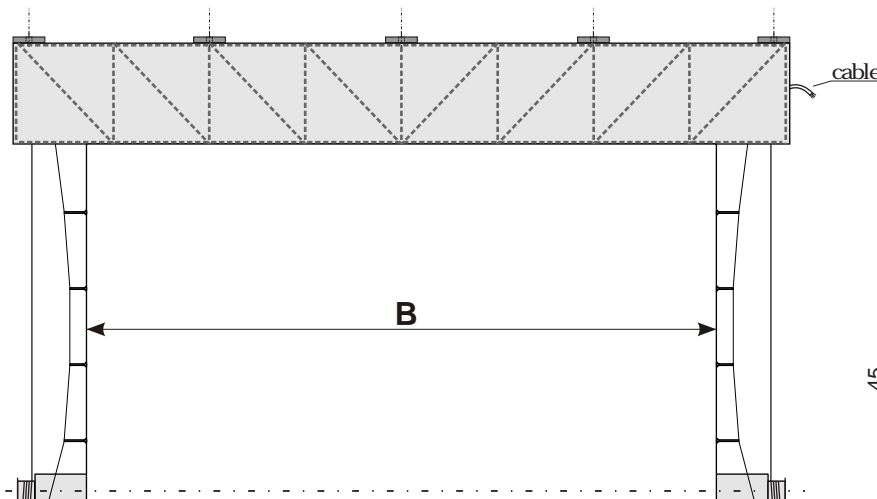

dimensions in v cm

B	1300	1400	1500
---	------	------	------